

# INTERIOR - TECHNISCHE FICHE

Acoustic absorption (ISO 354)

$$A_{\text{obj}} = 1$$

F (Hz)	A <sub>OBJ</sub> (m <sup>2</sup> )
125	0,3
250	0,7
500	1,0
1000	1,1
2000	1,0
4000	1,0

## START

Modular system consisting of High (H) and Low (L) modules. The material has a thickness of 45 mm\*\*.

$$h = \pm 610 \text{ mm}^{**}$$


$$b = \pm 310 \text{ mm}^{**}$$

$$w_1 = 144 \text{ mm}^{**}$$

$$w_2 = 129 \text{ mm}^{**}$$

Fire resistance

EN 13501-1 : E\*

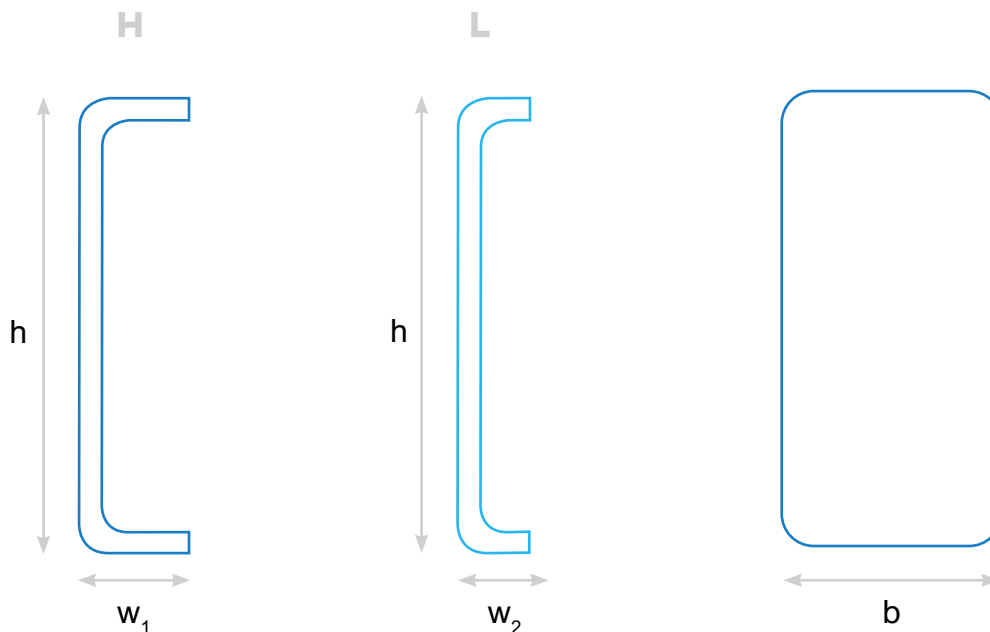

\* The pre-tests have already taken place and gave a result that class E is definitely achieved. Further tests to determine which reaction to fire will be achieved will be carried out in 2023.

\*\* These values are approximate, since we work with textiles, there may be limited deviations from the given values.